

## **BNC keystone coupler 75 Ohm**



### **BNC keystone coupler 75 Ohm (KBNC75whcp/KBNC75bkcp)**

The 75Ω BNC keystone jack is designed to support digital video signals, as well as any application requiring 75Ω BNC connectors. It is designed to snap into any standard sized keystone outlet or patch panel.

#### ***Features***

- 75Ω feed through female to female connector
- Nickel plating for improved performance with superior signal quality with minimal noise
- Provides a clean and neat appearance installation
- Snap in keystone jack provides a fast and easy installation
- Designed to fit industry standard keystone outlets and patch panels
- Black and white versions available to match panel or faceplate colour
- For HD and UHD see KBNC75bk/wh and KBNC1275bk/wh

#### ***Specifications***

- Weight: approx. 16.3g
- Dimensions: 32.5x16.85x21mm (LxWxH)
- Materials:
  - Keystone housing: ABS UL94V-0
  - Adaptor body: tarnish resistant nickel plated brass
  - Centre contact: gold plated zinc alloy
  - Insulator: PP
- Impedance: 75Ω & Frequency: 0 - 4 GHz




***Packaging:*** Supplied in individual polythene bags, then in bags of 20

***EAN:*** KBNC75whcp – 5055386507549      KBNC75bkcp – 5055386507556

***Commodity Code:*** 85177090

ROHS Compliant

**Code: KBNC1275bk/wh**

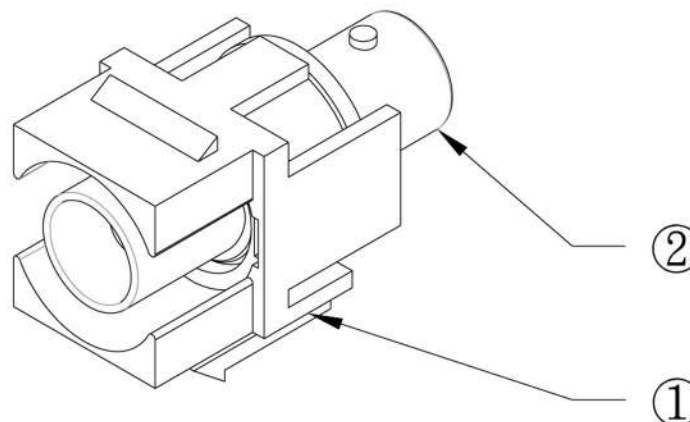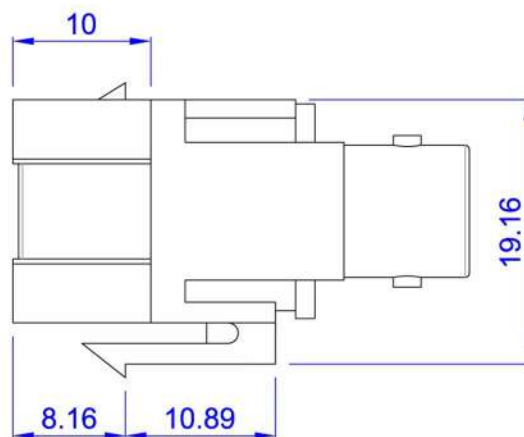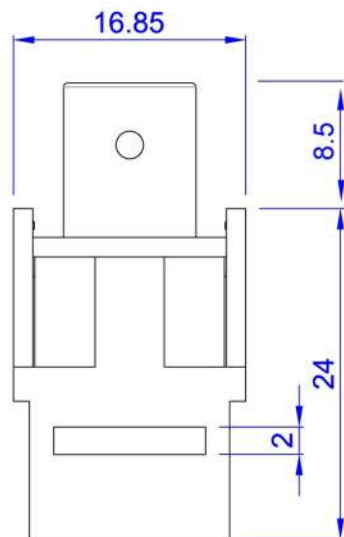

**Connector specifications:**

1. Keystone adaptor material: ABS UL94V-0 available in black or white
2. BNC connector: body: tarnish resistant nickel-plated brass  
Contact material: gold plated beryllium copper  
Impedance: 75 ohm  
Frequency: 0 - 18 GHz  
Insulator: PTFE

