

USB C female to angled male tailed socket



USB C female to angled male tailed socket (KUCCbk20, KUCCwh20):

Our USB C female to male tailed socket is an ideal solution for transmitting power and data. Designed to fit industry standard keystone patch panels, faceplate adaptors or surface mount boxes

Features:

- USB3.2 connection transmits at 4x the speed of USB3.0 connectors (20 Gbps vs 5 Gbps)
- Standard profile keystones offered in black and white
- Suitable for use in keystone patch panels, faceplates or surface mount boxes
- Compact and robust; angled tail allows for minimal intrusion
- Current rating: 5A

Specifications:

- Net weight (including primary packaging): 22 g
- Dimensions: 200 x 33.67 x 16.30mm
- Colour: black or white socket with black tailed plug
- Materials:
 Socket: ABS UL94V0
 Tail: PVC UL2725

Packaging: Packed in individual poly bags then in bags of 20

Commodity code: 85444920

Also available in Euro and 6C angled faceplates



KUCC2045pt




KUCC20645pt

EAN: KUCCbk20: 5055386511119
KUCCwh20: 5055386511126
KUCC2045pt 5055386513267
KUCC20645pt 5055386513298

Country of Origin: China

Circuit Configuration

P1	P2
A6	A6
A7	A7
B6	B6
B7	B7
A5	A5
A8	A8
B8	B8
VBUS	VBUS
GND	GND
A2	A2
A3	A3
B11	B11
B10	B10
B2	B2
B3	B3
A11	A11
A10	A10
Braided Shield	
Shell	Shell
VBUS: A4-B4-A9-B9	
GND: A1-B1-A12-B12	

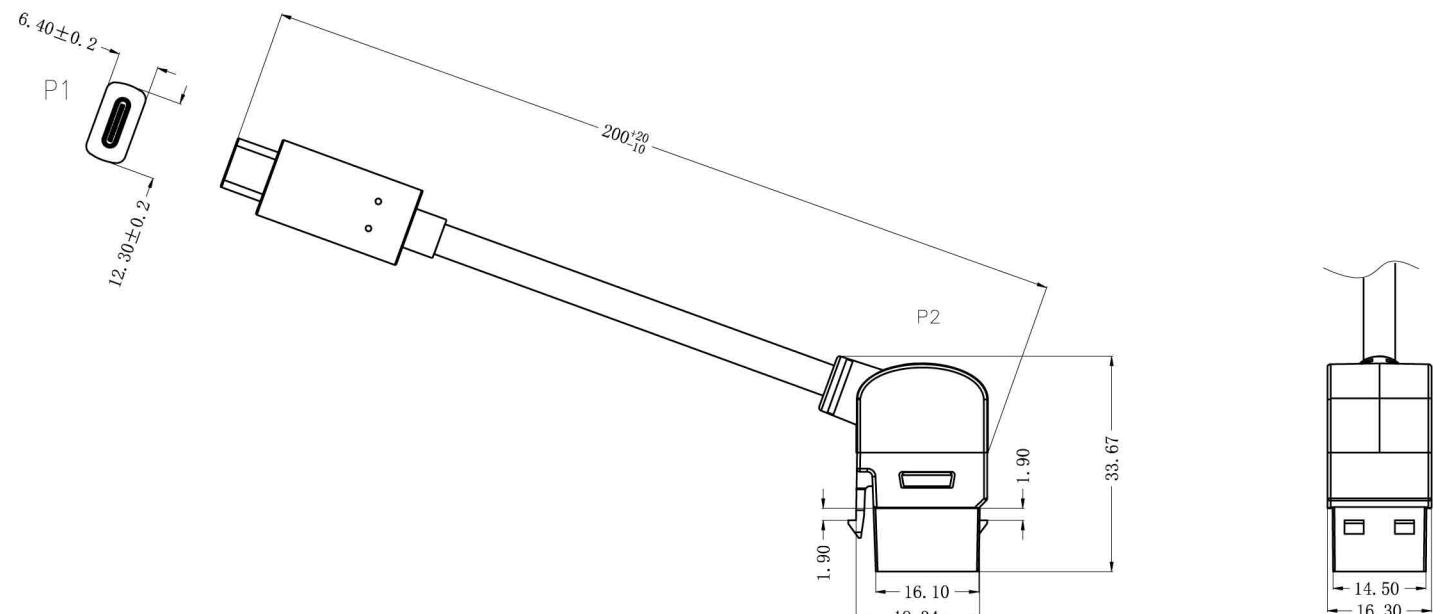

Electrical Specification

Insulation Resistance: 10MΩ

Voltage Proof: DC300V/0.01S

Contact Resistance: 3Ω

Current Rating: MAX 100W(20V/5A)

