


## Contractor Grade Category 6 Unshielded Field Termination Plug

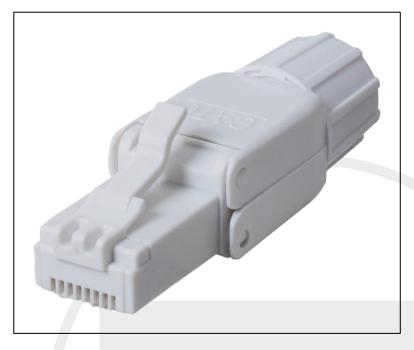

#### **Contractor Grade Category 6 Field Termination Plug (PFT6)**

TUK's Contractor Grade Category 6 field termination plug is the ideal low-cost solution for timesaving and efficient on-site RJ45 assembly for voice, Category 5e and Category 6 Ethernet cabling. It can be assembled on all standard types of cable, quickly and with no requirement of special tools. Designed for MPTL terminations, this field termination plug offers flexibility and saves time and money on installation, repairs and maintenance.

### Features:

- Category 6 Class EA Field Termination Plug with 568A and B wiring guide
- High performance also performs to Category 6A UTP standard
- No tools required for time saving and efficient termination on site
- Suitable for use with stranded or solid core cable designed for Modular Plug Terminated Link (MPTL) terminations
- Suitable for cable OD 6-8.5mm with core OD 1.0 1.5mm, copper core sizes 22-24 AWG/0.5-0.65 mm
- Rated for 750 mechanical cycles
- NOT suitable for short patch leads

#### Specifications:

Net weight: 8g (including primary packaging):
Dimensions: 90x70x15mm (in primary packaging)

• Colour: White

Materials: Body - Polycarbonate

Contacts – Zinc coated phosphor bronze with  $50\mu$ " /  $1.27\mu m$  gold plating

Packaging: Packed in individual poly bags then in boxes of 50

**EAN:** 5055386513441

Commodity Code: 85444920


Country of Origin: China


TUK Ltd, Unit 4, Wimbledon Stadium Business Centre, Riverside Road, London SW17 0BA


Tel: 020 8946 6688 Email: sales@tuk.co.uk Website: www.tuk.co.uk





ROHS Compliant Code: PFT6



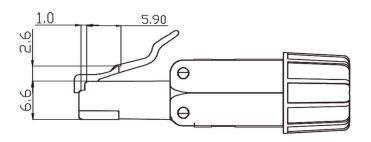

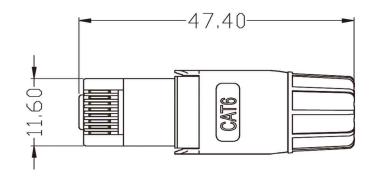










# CAT6 UNSHIELDED TOOLLESS PLUG INSTRUCTION MANUAL



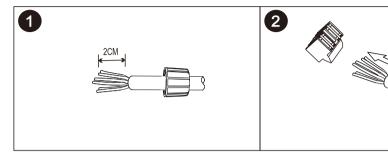







Strip 2cm of cable jacket.

Insert cores into core carrier and follow colour code.


Trim flush excess wires.



Push cable and core carrier onto the PCB.



Firmly close and secure by screwing on the end cover.



The plug is terminated.



Cat 6 Code: PFT6