


Professional D UNIVERSAL 8/12/16 Port XLR Patch Panels

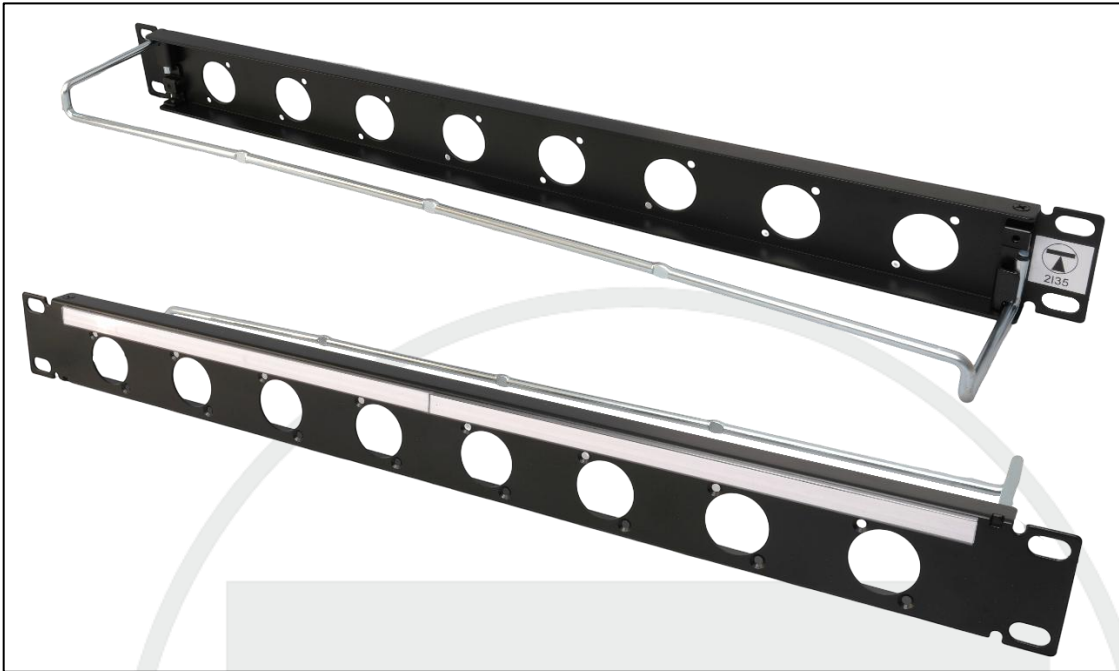

D UNIVERSAL 8 Port XLR Professional Patch Panel (FFDU8mcpr)

D UNIVERSAL 19" XLR type Professional patch panel available in 8, 12 and 16 port versions with large size label holder and removeable cable lacing bar, suitable for D UNIVERSAL and Neutrik D series XLR type connectors. The panels are supplied 'ready to go' with the appropriate number of mounting frames and countersunk screws to facilitate mounting XLR and D UNIVERSAL type connectors. These Professional panels can be fitted into standard 19" racks or cabinets.

Features

- Countersunk (unthreaded) screw holes for connector mounting
- Large labelling facility (NB no port numbering)
- Removeable cable lacing bar
- Supplied with 8, 12 or 16 XLR mounting frames ([KADMF](#)) and M3 screws
- Supplied with 8, 12 or 16 cable ties and cage nut set

Specifications

- Colour: Black
- Weight: (including primary packaging)
 - FFDU8mc: 607 grams
 - FFDU12mc: 596 grams
 - FFDU16mc: 584 grams
- Dimensions: (in primary packaging)
 - FFDU8mcpr: 520x80x75mm
 - FFDU12mcpr: 520x80x75mm
 - FFDU16mcpr: 520x80x75mm

- Materials:

Panel: Coated cold rolled steel

Mounting adapter: Polycarbonate UL94V

Labelling facility: PVC

Packaging: Individually packed in brown card carton then in cartons of 15

EAN:




FFDU8mcpr: 5055386513700

FFDU12mcpr: 5055386513717

FFDU16mcpr: 5055386513724

Commodity Code: 85177090

Country of Origin: China

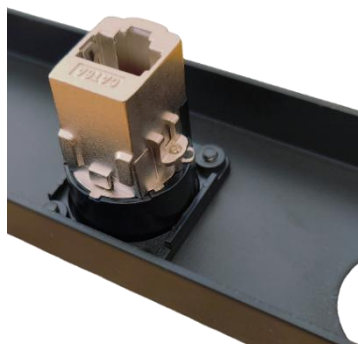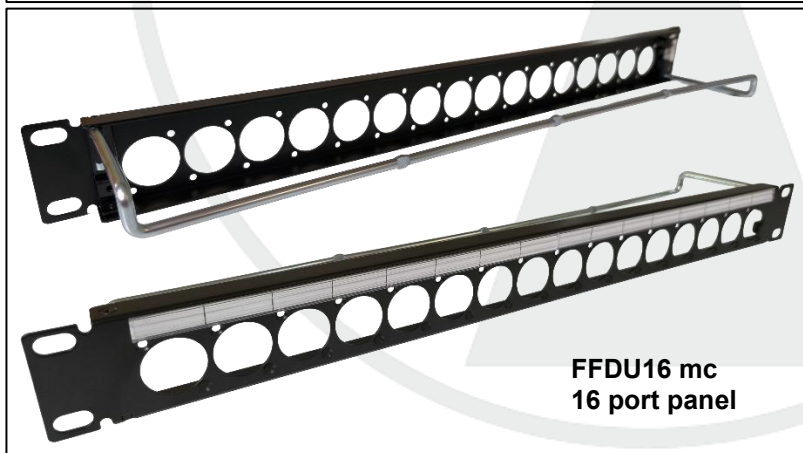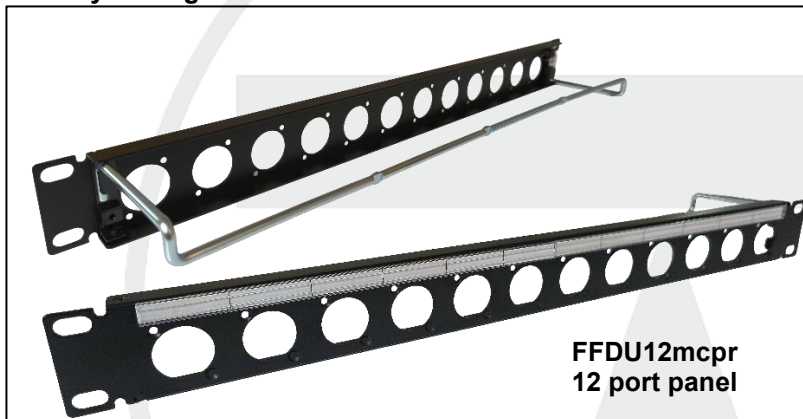


Illustrative image of D
Universal coupler mounted
using mounting frame KADMF

TUK Ltd, Unit 4, Wimbledon Stadium Business Centre, Riverside Road, London SW17 0BA


ROHS Compliant

Code: FFDU8mcpr

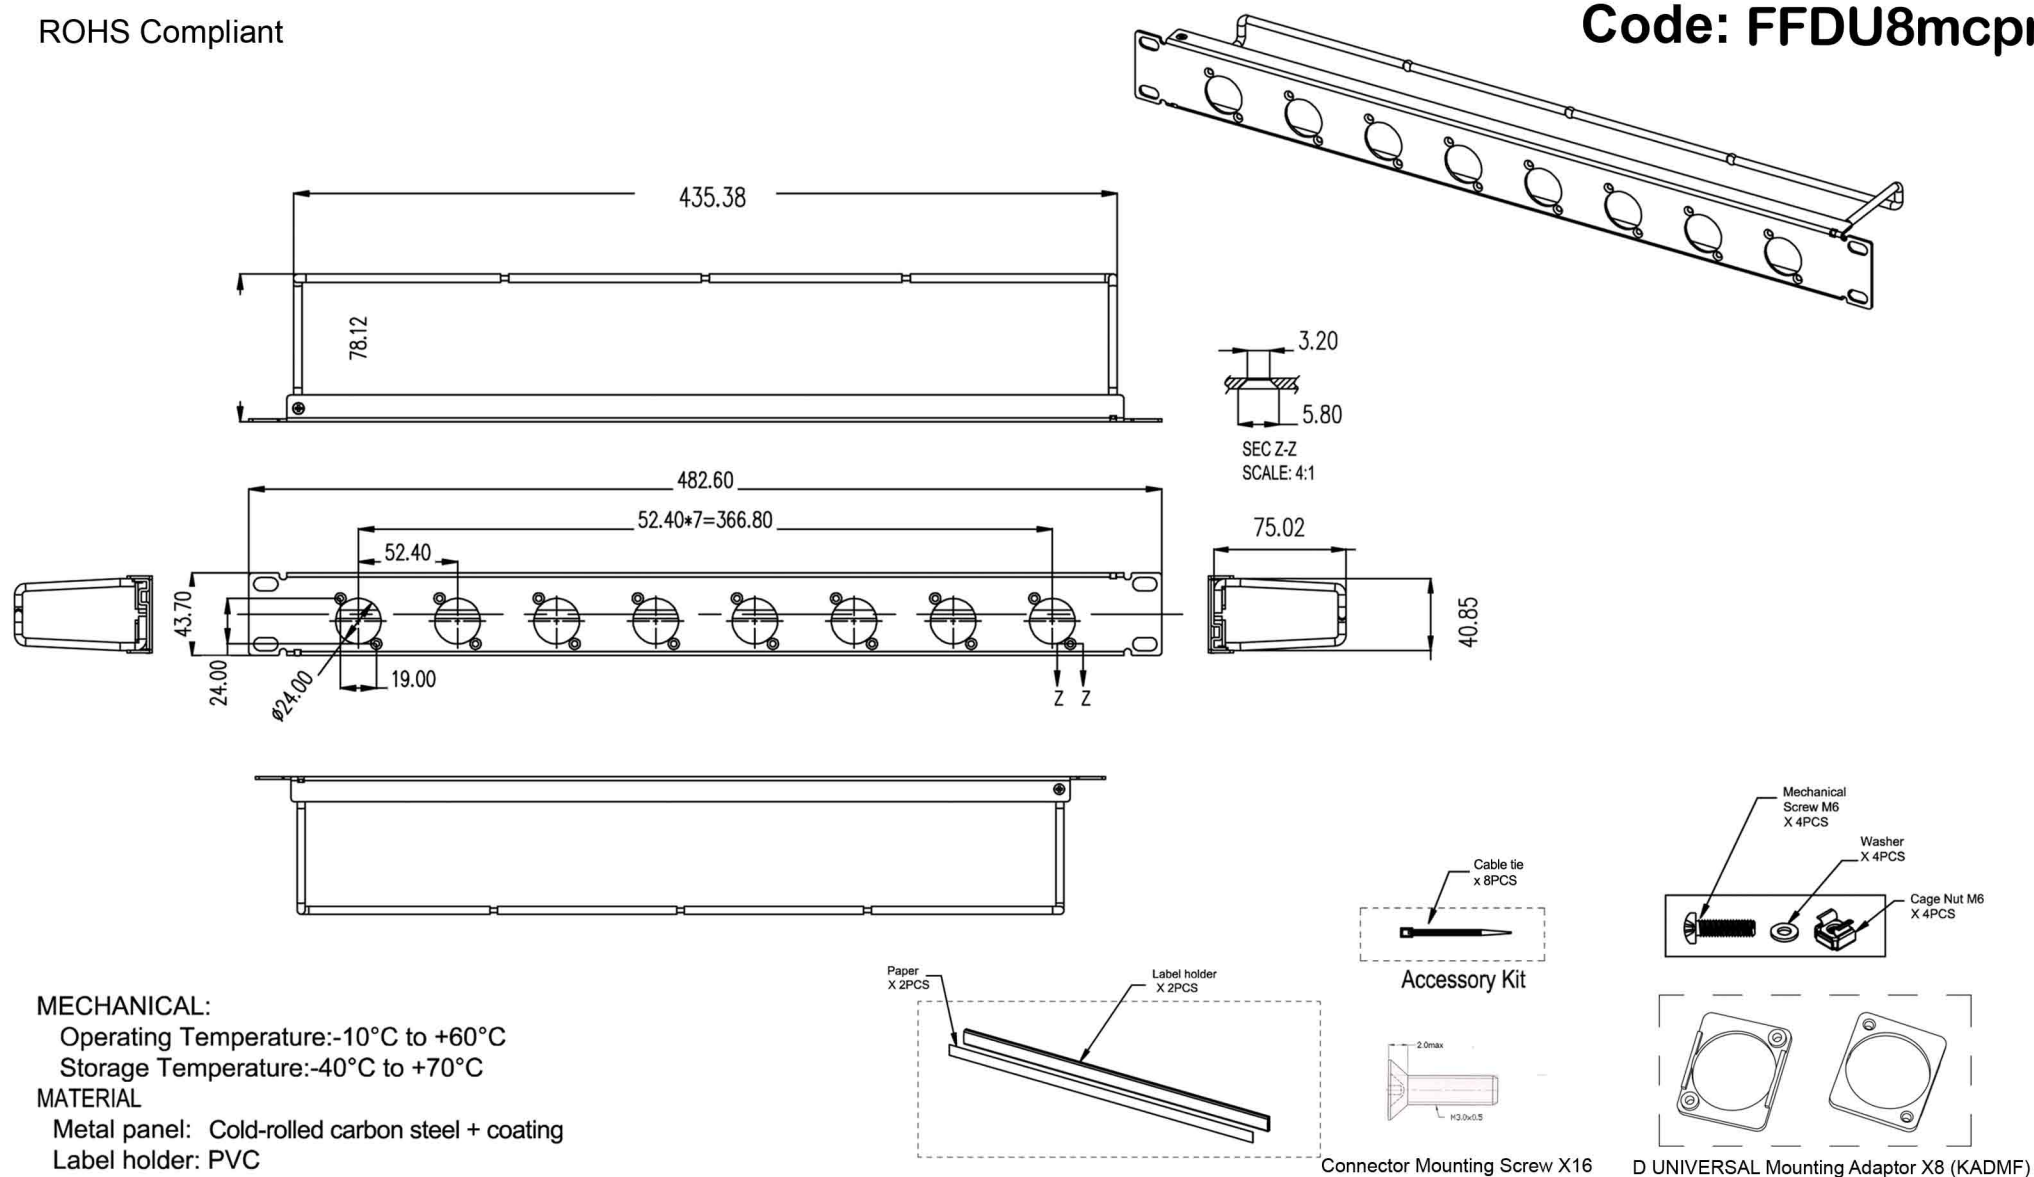

ROHS Compliant

Code: FFDU12mcpr

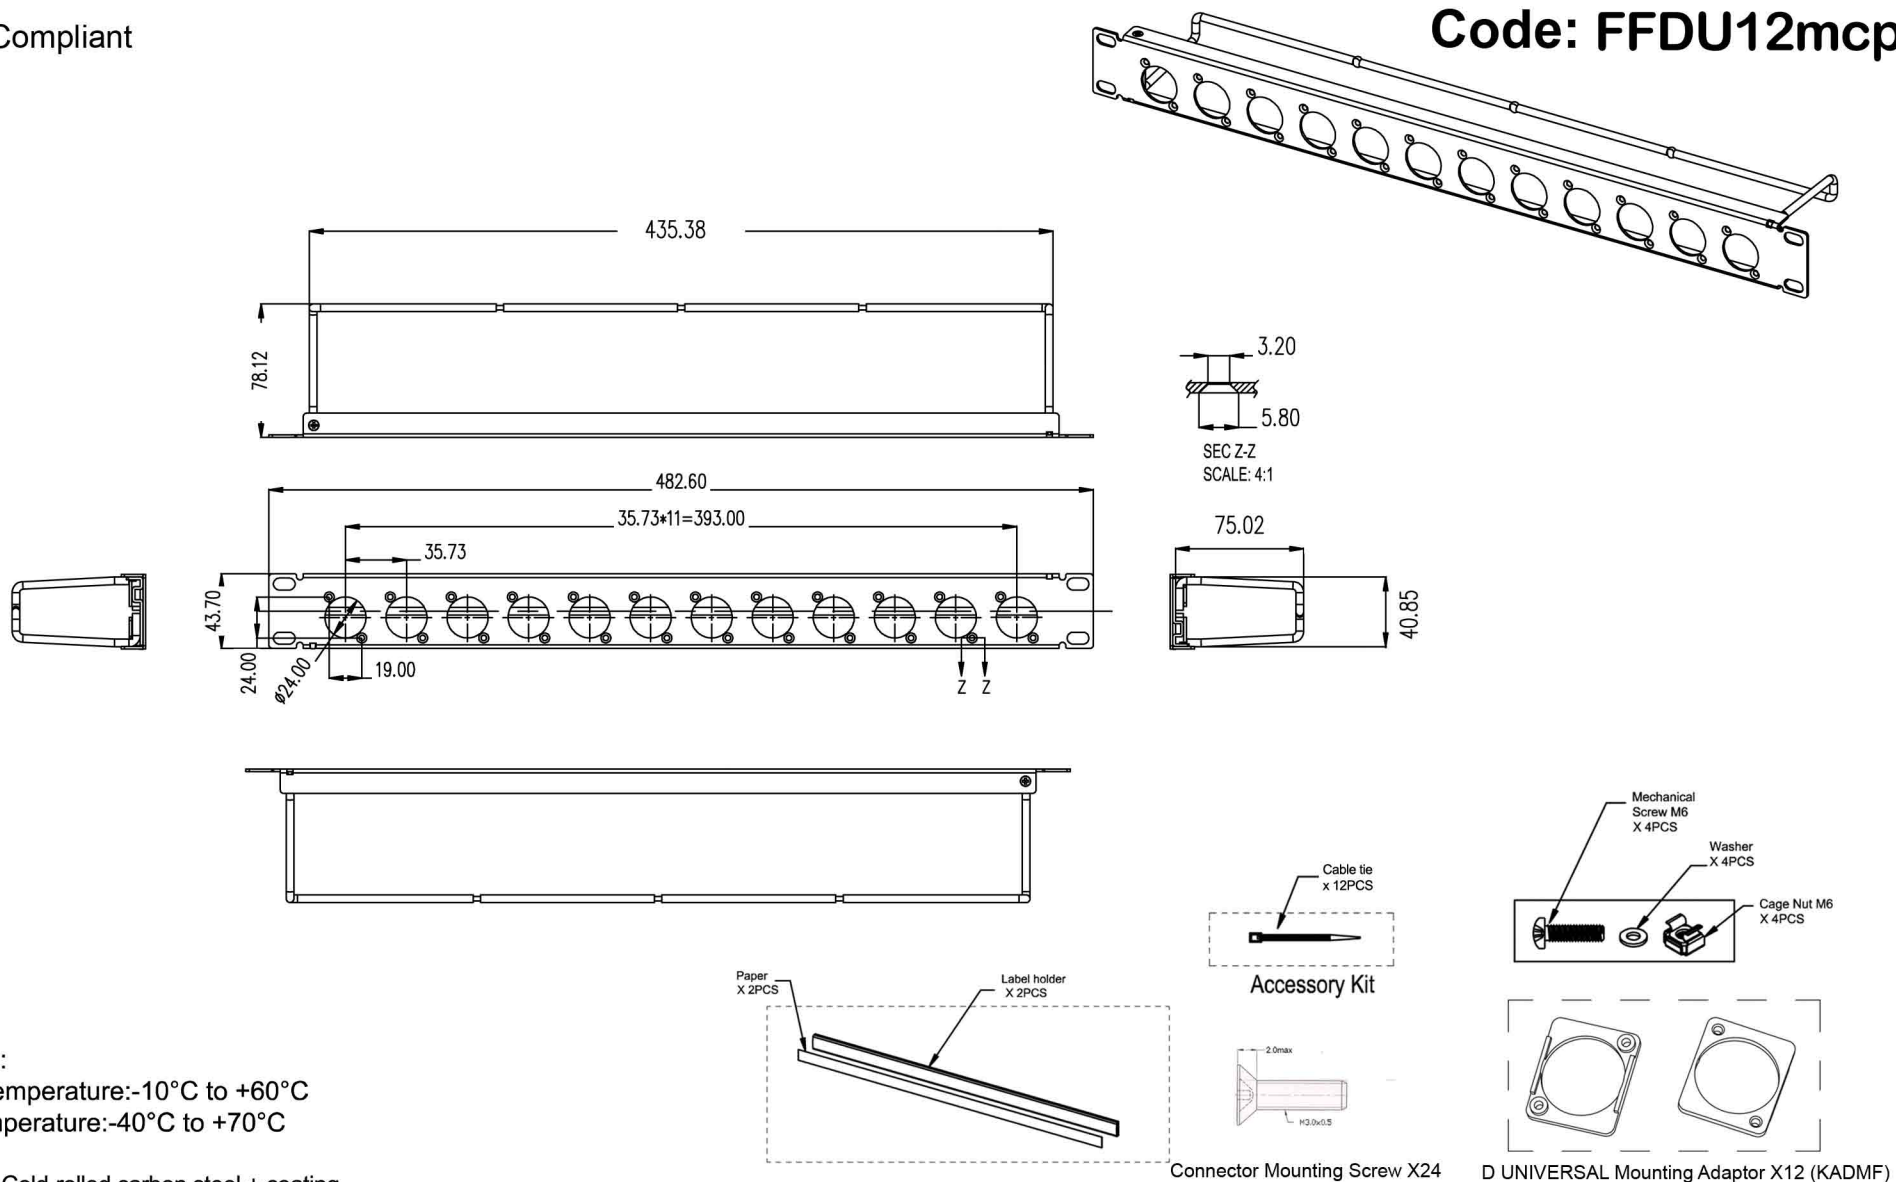

MECHANICAL:

Operating Temperature: -10°C to +60°C

Storage Temperature: -40°C to +70°C

MATERIAL

Metal panel: Cold-rolled carbon steel + coating

Label holder: PVC

TUK Ltd, Unit 4, Wimbledon Stadium Business Centre, Riverside Road, London, SW17 0BA

18/11/2025

Tel: 020 8946 6688 Fax: 020 8879 7410 Email: sales@tuk.co.uk Website: www.tuk.co.uk

ROHS Compliant

Code: FFDU16mcpr

